
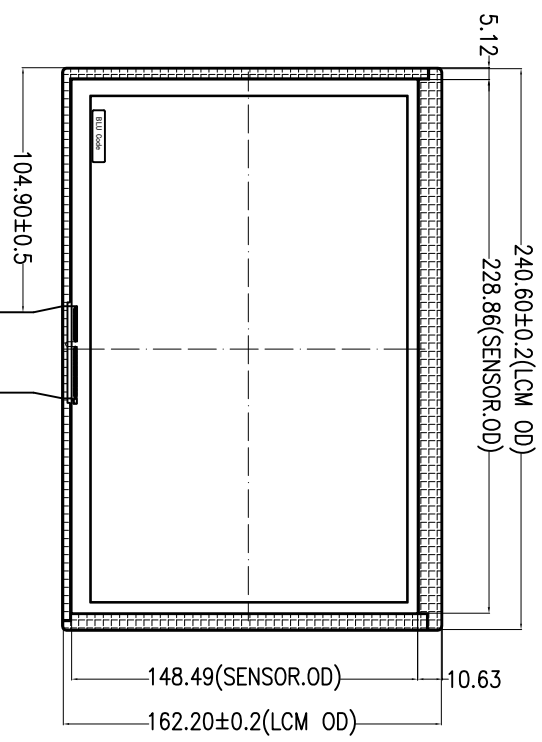
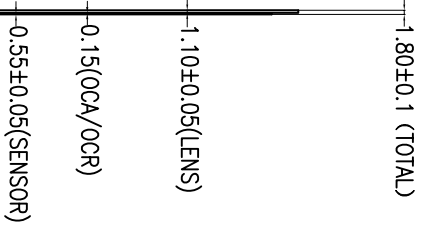


No ROHS hazardous material

Ordinal	Modify content description	Cartographer	Date of change
△			
△			

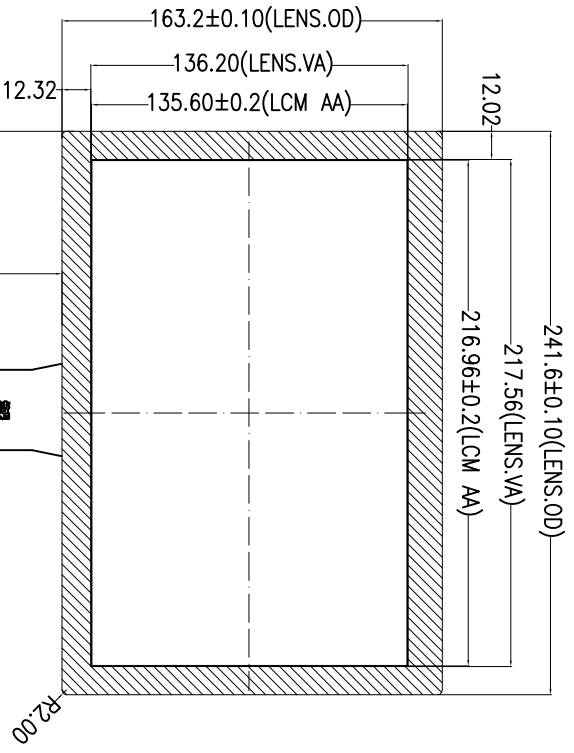


Screen printing area: Print Black

Front view

Double-sided Frame adhesive =0.175mm (3M9495)


Side view

Back view



Technical parameters

1. Interfaces:	USB	8. Transmittance:	≥85%
2. Structure :	G+G	9. Surface hardness:	≥6H
3. IC solutions:	II, I2511	10. Operate :	-20℃~+70℃, ≤85%RH
4. Impact resistance	30.000A, Steelball /132g/height=30cm/Time	11. Storage :	-30℃~+80℃, ≤85%RH
5. Touch points:	10 points	12. Brightness:	350cd/m2
6. Power supply:	5V	13. Viewing angle:	85/85/85/85
7. Humidity range:	45~85%RH	14. Unmarked dimension tolerance	as±0.2

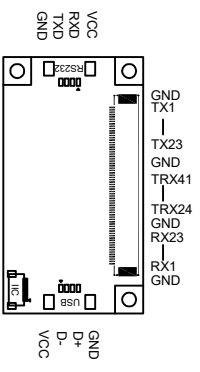

杭州宏梟科技有限公司
GraHowlet Technology CO., Ltd

Model	HX1011703		view direction		Unit	MM	
Version	V1.0	Designer	LIU0	Date	2017-4-11	Edition	A1
Customer		Approved	HBZ	Date	2017-4-11	Proportion	1:1